



Thank you for purchasing a ZTechnik product. Read these instructions carefully and thoroughly before beginning work. Dealers, if installing this windscreen for a customer, please give them this manual. It contains information needed to properly maintain and use this product.

 <p><b>Attention:</b> Special notes and cautionary measures which can prevent damage to the accessory or motorcycle.</p>	 <p><b>Note:</b> Tips for facilitation of operation, control and adjustment, as well as maintenance work.</p>
---	--

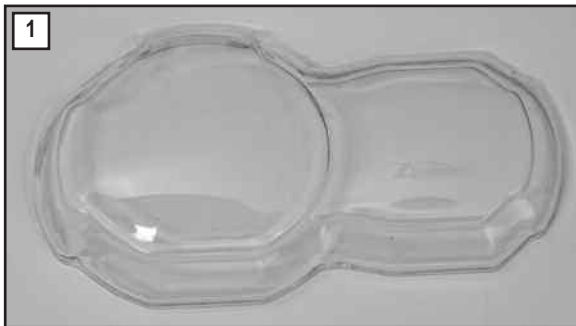

**CONTENTS OF KIT**

Item	Description	Part No.	Qty.
1	Headlight Guard with Quantum Hardcoat		1
<b>Bag#1154</b>			
2	Velcro Hook	77-771159-000	9
3	Velcro Loop	77-771160-000	9

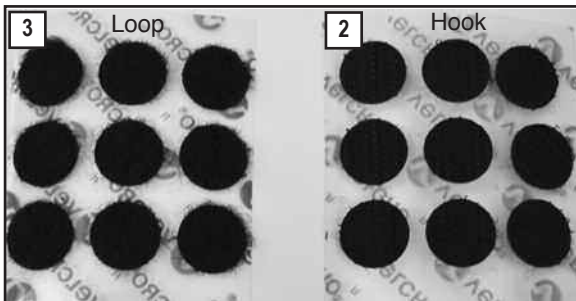

**TOOLS REQUIRED:**

Grease Pencil or Crayon



**PREPARATION**

**NOTE:** Cleaning is critical. Be sure to remove all wax, cleaners, and protectants (Armor-All). These can contaminate the adhesive causing it to fail.

1. Thoroughly clean the motorcycle's surface around the headlight rim. First wash the area, as you would normally clean the motorcycle.
2. Dry thoroughly with clean cloth. *Do not* apply wax or polish to the area cleaned.



Figure 1

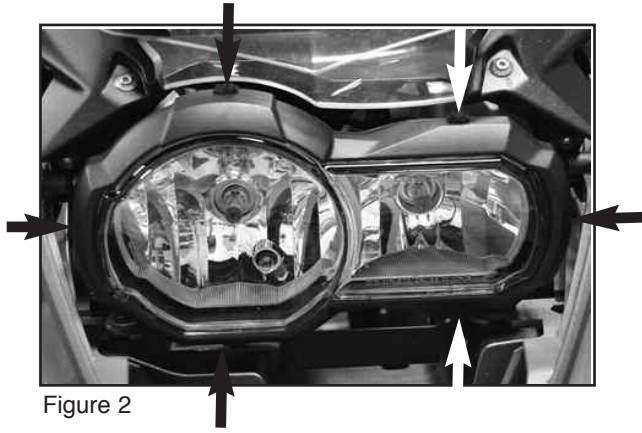


Figure 2

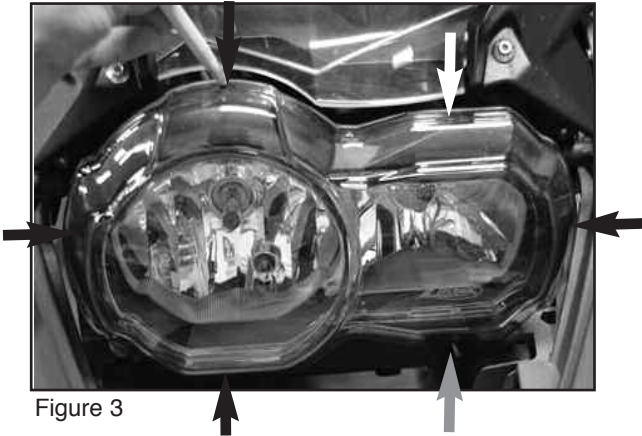


Figure 3




Figure 4



Figure 5

## INSTALLATION

**Velcro® Industrial grade fastener securely holds your Quantum Hardcoated Polycarbonate Headlight Cover to the motorcycle's headlight. Please follow the simple installation instructions below.**

 Temperature is critical for the best performance and adhesion. Headlight Cover and motorcycle surface should be a minimum of 65 °F (18 °C)

**1. On the Headlight Rim install 6 pieces of the Velcro Loop as shown in figure 2.**

**2. Place headlight guard on motorcycle.**

Make a mark on the *outside* of the Guard where the **Hook** will match to the Loop. **Figure 3 (Grease Pencil)**

Remove Guard.

**3. Install Hook** at the mark on the *inside* of the Guard. Press down to ensure good contact of adhesive with Guard. **Figure 4**

 **Let Velcro Hook and Loop cure for 5 minutes before installing Headlight Guard.**

**4. Install Guard.** Make certain Loop and Hook are fully engaged. **Figure 5**

## CLEANING AND MAINTENANCE

To clean the guard, wash with a clean soft cloth, plenty of warm water and if necessary, a non-abrasive soap such as dishwashing liquid. Flannel or soft chamois make good cleaning cloths. **Paint, glue residue or grease removal:** Moisten cotton with naphtha or turpentine followed by a wash as above.

Do not clean the guard with glass cleaners, alcohol, or strong solvents.